

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number
WO 2004/052565 A1

(51) International Patent Classification⁷: **B08B 9/02**,
F16L 55/24

(21) International Application Number:
PCT/BE2003/000216

(22) International Filing Date:
10 December 2003 (10.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1022126 10 December 2002 (10.12.2002) NL

(71) Applicant and

(72) Inventor: VAN BOGAERT, Rafaël [BE/BE]; Kemelgat-
straat 68, B-9190 Stekene (BE).

(74) Agents: LUYYS, Marie-José et al.; Gevers & Vander
Haeghen, Holidaystraat, 5, B-1831 Diegem (BE).

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ,

CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE
(utility model), DE, DK (utility model), DK, DM, DZ, EC,
EE (utility model), EE, EG, ES, FI (utility model), FI, GB,
GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL,
PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL,
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: PIPE-CLEANING DEVICE

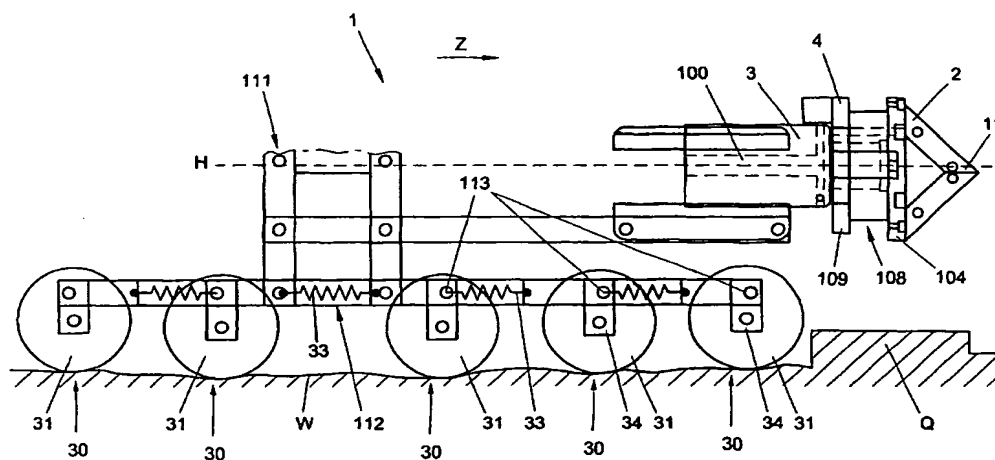

(57) **Abstract:** A pipe-cleaning device (1) comprising a cutting head (2) for cutting away material on the interior of a pipe, a body (111) on which the cutting head is rotatably mounted and drive means (3, 4) for driving the rotation of the cutting head (2) with respect to the body (111). In a first aspect the cutting head (2) is provided with one or more inwardly collapsible cutting elements (21) and the body (111) has a plurality of arrays of inwardly collapsible support elements (30) extending in longitudinal direction of the body (111) for supporting the body (111) on the interior of a pipe. In a second aspect the cutting head (2) comprises at least one first collapsible cutting element (21) which extends radially from a rigid central part (11), ends in a first cutting block (22) and is provided with at least one mass increasing element (22) at an intermediate location. In a third aspect, the drive means comprise a stator (3) and a rotor (4), the stator having at least one nozzle (7) for directing a liquid stream successively onto a plurality of drive elements (5) of the rotor (4), the at least one nozzle (7) extending substantially within a plane (V) perpendicular to the rotation axis (9) of the rotor and being located inwardly from the rotor (4).